


**CHOOSE YOUR COLOR**



# Grout Colors For Tile & Stone

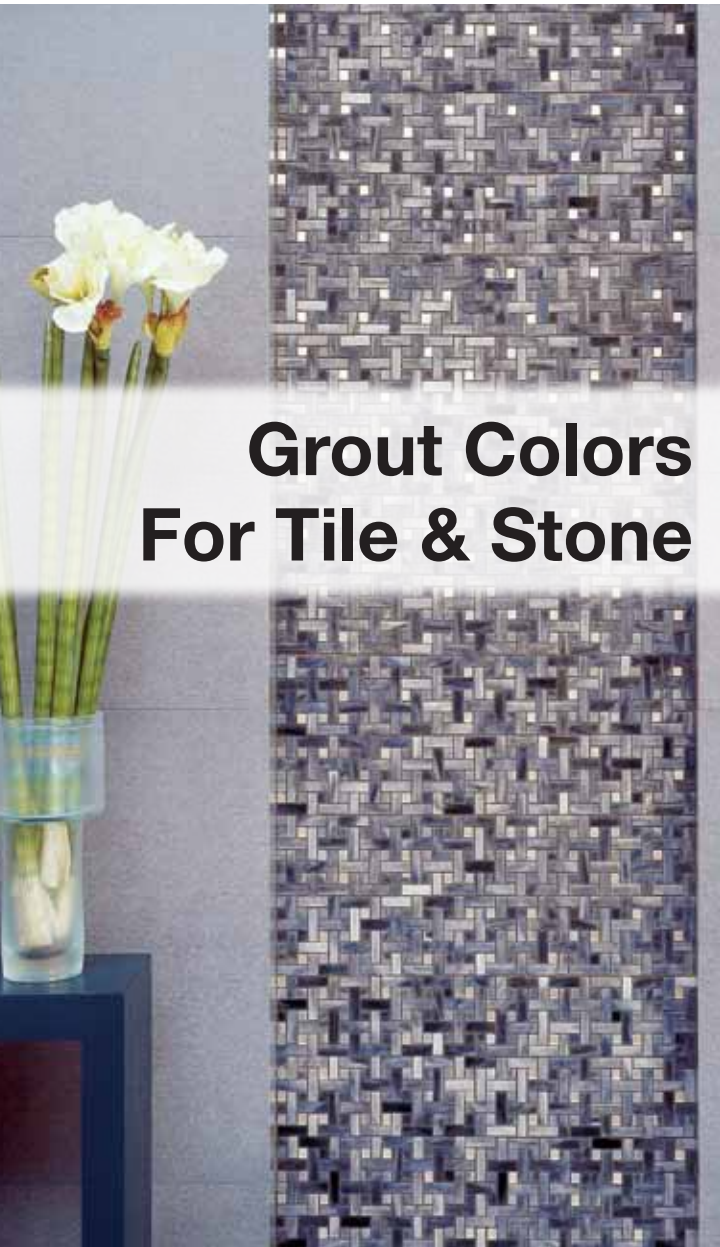

**CUSTOM GROUT SOLUTIONS**





	Polyblend Sanded	Polyblend Non-Sanded	Prism SureColor	CEG-Lite 100% Solids Epoxy	100% Solids Epoxy
For joint widths up to 1/8"		■	■	■	■
For joint widths 1/8" to 1/2"	■		■	■	■
For joint widths 1/16" to 1/2"			■	■	■
Highly durable joints, resistant to shrinking and cracking	■	■	■	■	■
Interior application	■	■	■	■	■
Exterior application	■	■	■	■	■
Mix with water	■	■	■		
Maximum stain resistance			■	■	■
Excellent chemical resistance				■	■



## Coverage



	Polyblend® Sanded Grout					Polyblend® Non-Sanded Grout	
	SQ. FT. PER 25 Lbs					SQ. FT. PER 10 LBS.	
TILE SIZE	GROUT JOINT WIDTH					GROUT JOINT WIDTH	
	1/16"	1/8"	1/4"	3/8"	1/2"	1/16"	1/8"
1" x 1" x 1/4"	63	40	25	23	20	44	20
2" x 2" x 1/4"	88	73	50	40	33	85	40
3" x 3" x 1/4"	150	103	80	55	45	126	60
4 1/4" x 4 1/4" x 1/4"	210	143	110	75	60	149	78
6" x 6" x 1/4"	263	178	136	93	70	250	120
8" x 8" x 3/8"	230	155	113	75	50	220	110
12" x 12" x 3/8"	345	230	175	118	90	331	171
16" x 16" x 3/8"	458	305	225	144	94	370	185
20" x 20" x 3/8"	567	381	280	189	142	453	227
24" x 24" x 3/8"	685	458	325	225	150	659	330



# Prism® SureColor® Grout

## SQ. FT. PER 17 LBS.

TILE SIZE	GROUT JOINT WIDTH					
	1/16"	1/8"	3/16"	1/4"	3/8"	1/2"
1" x 1" x 1/4"	126	63	40	25	23	20
2" x 2" x 1/4"	176	88	73	50	40	33
3" x 3" x 1/4"	300	150	03	80	55	45
4 1/4" x 4 1/4" x 1/4"	420	210	143	110	75	60
6" x 6" x 1/4"	526	263	178	136	93	70
8" x 8" x 3/8"	460	230	155	113	75	50
12" x 12" x 3/8"	690	345	230	175	118	90
16" x 16" x 3/8"	916	458	305	225	144	94
18" x 18" x 3/8"	1024	512	343	253	167	118
24" x 24" x 3/8"	1380	685	458	325	225	150



# CEG-Lite™ Commercial 100% Solids Epoxy Grout

## SQ. FT. PER 1 GALLON

TILE SIZE	GROUT JOINT WIDTH				
	1/16"	1/8"	1/4"	3/8"	1/2"
1" x 1" x 1/8"	100	54	32	24	20
1" x 1" x 1/4"	50	27	16	12	10
2" x 2" x 1/4"	95	50	27	20	16
4 1/4" x 4 1/4" x 1/4"	198	101	53	37	29
6" x 6" x 1/4"	277	141	73	50	38
6" x 6" x 1/2"	139	70	36	25	19
8" x 8" x 3/8"	246	124	64	43	33
8" x 8" x 1/2"	184	93	48	33	25
12" x 12" x 3/8"	367	185	94	64	48
16" x 16" x 3/8"	489	246	124	84	64
12" x 12" x 1/2"	275	139	70	48	36
24" x 24" x 1/2"	549	275	139	93	70

Coverages are approximate and may be reduced by 10 - 20%+ based on waste, spillage and project conditions.

## 100% Solids Epoxy Grout

## Saltillo Grout

TILE SIZE	SQ. FT. PER GROUTING UNIT				SQ. FT. PER 50 LBS.		
	GROUT JOINT WIDTH				GROUT JOINT WIDTH		
	1/16"	1/8"	1/4"	3/8"	3/4"	1"	1-1/4"
1" x 1" x 1/4"	55	43	31	23	N/A	N/A	N/A
2" x 2" x 1/4"	110	74	60	45	N/A	N/A	N/A
3" x 3" x 1/4"	155	106	82	58	N/A	N/A	N/A
4 1/4" x 4 1/4" x 1/4"	215	147	110	80	N/A	N/A	N/A
6" x 6" x 1/4"	295	204	155	106	N/A	N/A	N/A
8" x 8" x 3/8"	267	201	136	92	N/A	N/A	N/A
8" x 8" x 3/4"	N/A	N/A	N/A	N/A	37	30	25
12" x 12" x 3/8"	396	299	202	136	55	42	35
16" x 16" x 3/8"	527	397	267	176	80	60	50
20" x 20" x 3/8"	664	499	334	224	90	70	60
24" x 24" x 3/8"	802	599	396	267	110	84	70

For over 40 years, Custom Building Products have been leading the industry with improved products that are easier to use, work better, last longer and have the largest array of colors to choose from. So, when it comes to choosing a grout for your next installation, trust the company that understands your grout needs best, Custom Building Products.



Polyblend is the #1 most preferred brand of grout in America according to the 2009 ClearReport by Clear Seas Research.



Available in both sanded and non-sanded grout Polyblend produces hard, dense joints that are resistant to shrinking, cracking and wear while ensuring color consistency. Exceeds ANSI A118.6.



Delivering the SureColor® Promise, Prism offers consistent color with no shading and will not effloresce. Formulated with CustomLite® Technology, Prism is 32% lighter than other cement grouts and contains recycled material. Exceeds ANSI A118.7.



CEG-Lite is a 2-part blend of epoxies and aggregates that delivers a grout that is easy to work, uniform in color, and contains recycled content. CEG-Lite is very resistant to acids, alkalis and most solvents, while offering maximum resistance to staining and chemical attack. Exceeds ANSI A118.3.



For installations requiring high resistance to staining or chemical attacks, Custom's 100% Epoxy Grout is easy to work with and cleans up fast. Meets ANSI A118.3.



Contributes to "Leadership in Energy and Environmental Design" Certification.



Use Custom products for a quality tile or stone installation that is covered by a Lifetime Warranty.

Sample colors shown approximate as nearly as possible the color of the grout. Final installed shade may vary with the tile type and porosity, job site conditions and finishing techniques.



**CUSTOM**<sup>®</sup>  
BUILDING PRODUCTS

800-272-8786  
[www.custombuildingproducts.com](http://www.custombuildingproducts.com)



# CUSTOM GROUT SOLUTIONS



Grout	Selection
<b>Polyblend</b> Sanded Grout	<b>all colors</b>
<b>Polyblend</b> Non-Sanded Grout	<b>all colors</b>
<b>Prism</b> SureColor Grout	▲
<b>CEG-Lite</b> Epoxy Grout	■

\*100% Solids Epoxy Grout available in all 48 colors

#14 White Dove

#381 Bright White



#11 Snow White

#10 Antique White



#333 Alabaster



#382 Bone



#17 Butter Cream

#365 Canvas

#127 Antique Linen



#101 Quartz



#172 Urban Putty

#122 Linen



#22 Sahara Tan

#156 Fawn



#180 Sandstone



#380 Haystack



#135 Mushroom



#145 Light Smoke



#186 Khaki

#35 Chaparral



#384 Camel

#99 Burnt Clay

#50 Nutmeg

#45 Summer Wheat



#105 Earth



#183 Chateau



#185 New Taupe



#52 Tobacco Brown



#95 Sable Brown

#59 Saddle Brown



#390 Rose Beige

#96 Quarry Red Clay



#190 Bay Leaf

#311 Moss

#312 Bonsai



#305 Onyx Green

**#301 Arctic Ice**

**#90 Ocean Blue**

**#92 Admiral Blue**

**#115 Platinum**

**#386 Oyster Gray**

**#165 Delorean Gray**

**#335 Winter Gray**

**#19 Pewter**

**#168 Slate Gray**

**#370 Dove Gray**

**#09 Natural Gray**

**#60 Charcoal**

---

Sample colors shown approximate as nearly as possible the color of the grout. Final installed shade may vary with the tile type and porosity, job site conditions and finishing techniques.

---