

# CustomTECH<sup>®</sup>

FLOORING PREPARATION SYSTEMS



## TechPatch<sup>™</sup> MP

### Calcium Aluminate Based Rapid Setting Multipurpose Patch

**TechPatch MP is a fast setting, calcium aluminate compound that provides a smooth finish on interior subfloors prior to the installation of a wide variety of floor coverings.**

- Patches and smooths interior subfloors
- Apply from featheredge to 1/2" (13 mm)
- Install flooring as early as 30 - 90 minutes



Scan this to  
learn more about  
TechPatch MP!



A DIVISION OF

**CUSTOM<sup>®</sup>**

A QUIKRETE<sup>®</sup> COMPANY

# TechPatch™ MP Multi-Patch

## Calcium Aluminate Based Rapid Setting Multipurpose Patch

TechPatch™ MP is a fast setting, calcium aluminate compound that provides a smooth finish on interior subfloors prior to the installation of a wide variety of floor coverings. Mix with water only to patch, level or skim coat concrete and plywood up to 1/2" (12 mm) thick per application. Install floor coverings in as early as 30 – 90 minutes.

### Uses:

Suitable as an Underlayment for:

- Luxury Vinyl Tile (LVT)
- Luxury Vinyl Planks (LVP)
- Carpet flooring
- Vinyl Composition Tile (VCT)
- Sheet vinyl flooring
- Rubber flooring
- Hardwood; laminate and parquet flooring
- Porcelain, ceramic, glass, natural stone and terrazzo

### Suitable Substrates\*:

- Concrete, masonry and terrazzo
- Gypsum-based underlayment
- Existing resilient flooring
- Cutback adhesive residue
- Approved plywood and OSB
- Moisture mitigation membranes
- Existing ceramic tile & CBU

\*Preparation and/or primers may be required to bond to any of these substrates.

### Benefits of Product in the Installation:

- Quick-setting formula permits floor covering installation in as little as 30 – 90 minutes
- Smooths the finishes on interior subfloors
- Patches and levels concrete and plywood to 1/2" (13 mm)

### Ordering Information


ITEM CODE	SIZE	PACKAGE
TPMP25T	25 lb. (11.34 kg)	Bag

### Coverage

Typical square foot coverage per 25 lb. bag (square meter per 11.34 Kg)

Thickness	Square Feet		Thickness	Square Meter	
	Minimum	Maximum		Minimum	Maximum
1/16"	55.30	62.78	1.5 mm	5.14	5.83
1/8"	27.65	31.39	3 mm	2.57	2.92
3/16"	18.43	20.93	5 mm	1.71	1.94
1/4"	13.82	15.70	6.4 mm	1.28	1.46
3/8"	9.22	10.46	10 mm	0.86	0.97
1/2"	6.91	7.85	13 mm	0.64	0.73

Chart for estimating purposes. Coverage may vary based on installation practices and jobsite conditions. For more sizes, use the material calculator at [CustomBuildingProducts.com](http://CustomBuildingProducts.com) or contact CUSTOM Technical Services at 800-282-8786.

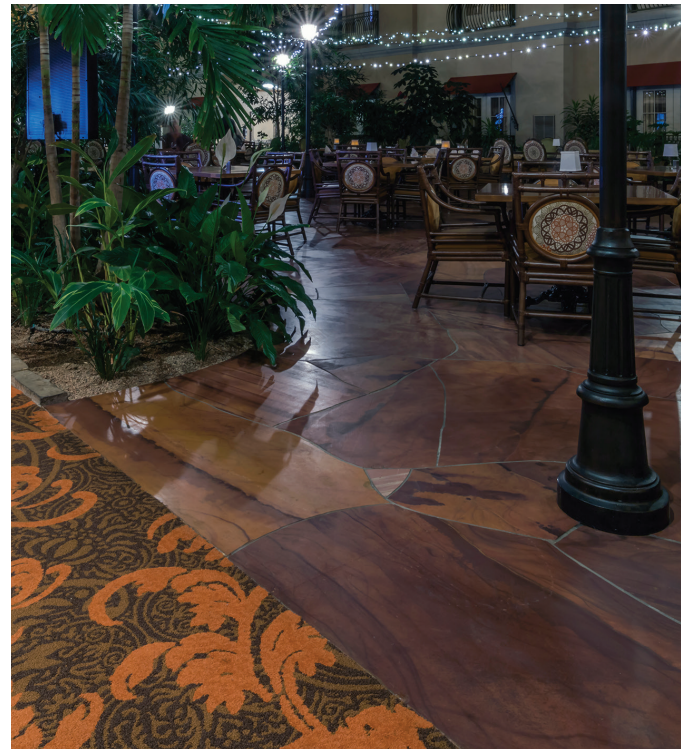

**Warranty:** Flooring Installation Systems products are backed by up-to a 25-year warranty. See [CustomTechFlooring.com](http://CustomTechFlooring.com) for full warranty information including limitations and exclusions.

©2024 Custom Building Products. All rights reserved. The CUSTOM® and CustomTech® logos, and select product logos are registered trademarks of Custom Building Products, Inc. CUSTOM may make product modifications at any time without notice. Visit [customtechflooring.com](http://customtechflooring.com) for updated technical data sheets and SDS information.

Custom Building Products  
800-272-8786  
[CustomTechFlooring.com](http://CustomTechFlooring.com)  
SS190 9/24R



A DIVISION OF

**CUSTOM**®

A QUIKRETE® COMPANY